



ELEVATION SERIES CUBE ICE MAKER

CIM1136/1135/1137

Ice-O-Matic
Ice. Pure and Simple

Model:

- ☐ CIM1136
- ☐ CIM1135
- ☐ CIM1137

CIM1136
ON B55



Safelce

*Available for factory or field install

Features and Benefits

- 30.25" (768 mm) wide space-saving design.
- Produces up to 1035 lbs (469 kg) of ice per day.
- *Energy and Environment*
 - Exceeds 2018 DOE (Department of Energy) regulations.
 - Up to 20% more energy efficient than other models.
 - Environmentally friendly, including BPA-free plastic and recyclable parts.
- *Sanitation*
 - Plastic Food Zone eliminates hard-to-clean nooks and crannies, allowing for effortless wipe down and easy, long-lasting sanitation.
 - Built in Agion® ensures unbeatable antimicrobial protection.
 - Smart LED light indicates machine status and when cleaning is required.
 - Simple, one-touch controls for sanitization and descaling.
 - BPA-free snap-in, snap-out dishwasher-safe components.
- *Unique Dual Exhaust* - Air-cooled machines are designed to discharge hot air from both the side and top of the unit, increasing installation flexibility and reducing the potential of obstructed exhaust.
- *Universal Smart Harness™* control board simplifies installation and servicing with better access, digital diagnostics, universal components and common configuration.

Safelce Purification System is an add-on option for CIM machines that destroys Coronavirus, Flu, Odors, Mold and other biological contaminants, increasing the life of the machine by up to 30%.



<https://www.youtube.com/watch?v=toReJT8QG6A&t=7s>

Ice Form

FULL CUBE DIMENSIONS	
W x D x H (in.)	7 $\frac{1}{8}$ x 7 $\frac{1}{8}$ x 7 $\frac{1}{8}$
W x D x H (mm)	22 x 22 x 22
HALF CUBE DIMENSIONS	
W x D x H (in.)	3 $\frac{1}{8}$ x 7 $\frac{1}{8}$ x 7 $\frac{1}{8}$
W x D x H (mm)	10 x 22 x 22



CUBE

Bin Chart Kits for Combining Wider Bins with Smaller Models

ICE STORAGE BINS											
	Model No.	B25	B40	B42	B55	B700	B110	B1000	B1300	B1325	B1660
	Capacity	242 lbs (110 kg)	344 lbs (156 kg)	351 lbs (160 kg)	510 lbs (232 kg)	680 lbs (308 kg)	854 lbs (388 kg)	1,000 lbs (454 kg)	1,320 lbs (599 kg)	1,325 lbs (601 kg)	1,660 lbs (753 kg)
	Width	30 in (762 mm)	30 in (762 mm)	22 in (559 mm)	30 in (762 mm)	30 in (762 mm)	48 in (1,219 mm)	48 in (1,219 mm)	48 in (1,219 mm)	60 in (1,524 mm)	60 in (1,524 mm)
Kits	CIM1136	Kit Not Required		N/A	Kit Not Required		BPF-1	Hold Down Securement Recommended			
	CIM1135										
	CIM1137										

*See Ice-O-Matic Price List for Adapter Kits to combine ice makers with most available ice/beverage dispensers.

Options & Accessories

WATER FILTERS		
Ice Machine Model	Manifold	
	System	Replacement
CIM1136	IFQ2	IOMQ (2)
CIM1135		
CIM1137		

Note: All modular cube CIM units can be installed with manufacturer approved ozone delivery systems.

Ice Maker Warranty

COMMERCIAL WARRANTY	
Ice Maker	3 YEARS parts and labor
Evaporator and Compressor	5 YEARS parts
Evaporator (when enrolled in our filter program)	7 YEARS parts and labor



CIM1136/1135/1137 CUBE ICE MAKER



ELEVATION SERIES CUBE ICE MAKER


CIM1136/1135/1137

Ice-O-Matic
Ice. Pure and Simple

Air Cooled

Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.



- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Electrical connection junction box, 7/8".

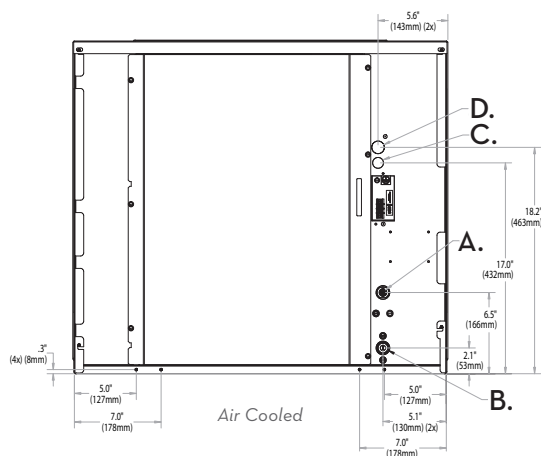

Water Cooled/Remote Cooled

- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Electrical connection junction box, 7/8" (remote).
- E. Condenser water in, 3/8" FPT (water only).
Discharge line, 1/2" male quick connect coupling for precharged line set (remote only).
- F. Condenser water out, 1/2" FPT (water only).
- G. Liquid line, 3/8" male quick connect for precharged line set (remote only).

Dual Exhaust for Installation Flexibility

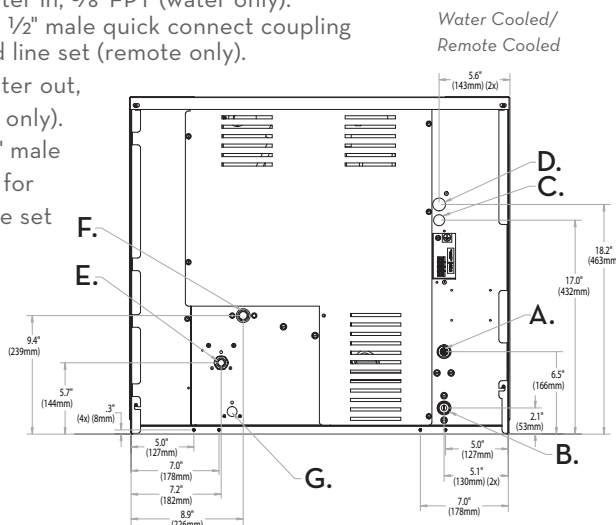

Operating Requirements

	MINIMUM	MAXIMUM	
		60 Hz	50Hz
Ambient Temp. Range Air	50 °F (10 °C)	100 °F (38 °C)	110 °F (43 °C)
Water Temp.	40 °F (4.4 °C)		
Water Pressure	20 PSIG (1.4 BAR)	80 PSIG (5.5 BAR)	
Remote Condenser Temp.	-20 °F (-29 °C)	120 °F (50 °C)	

Dimensions

ALL MODELS	
W x D x H (in.)	30.25 x 24.25 x 26.9
W x D x H (mm)	768 x 616 x 683

Specifications

Model Number	Cond. Unit	Ice Production per 24hrs		Water Usage gallons per 100 lbs of Ice 90°F air/70°F water		kWH Used per 100 lbs of ice @ 90°F air/70°F water	Voltage Characteristics	Min. Circuit Ampacity	Max Breaker Size	Approx. BTUs per hour
		70°F air/50°F water lbs (kg)	90°F air/70°F water lbs (kg)	Potable	Condenser					
CIM1136A	Air	932 (423)	739 (335)	19.0	N/A	5.1	208-230/60/1	13.9	25	18,200
CIM1136R**	Remote	968 (439)	830 (376)		N/A	4.9		14.3		
CIM1136W	Water	968 (439)	851 (386)		140	4.1		13.3		
CIM1135A	Air	937 (425)	824 (374)	18.0	N/A	5.2	220-240/50/1	15.2	25	19,300
CIM1135R**	Remote	1,035 (470)	927 (420)		N/A	4.6		15.6		
CIM1135W	Water	1,030 (467)	927 (420)		110	4.2		14.6		
CIM1137A	Air	917 (416)	735 (333)	19.0	N/A	5.2	208-230/60/3	9.5	15	18,450
CIM1137R**	Remote	973 (442)	830 (376)		N/A	4.8		9.9		
CIM1137W	Water	994 (451)	870 (394)		140	4.0		8.9		

* Daily ice production based on half cube configuration. When installing a CIM on a drink dispenser, the **KCUBEDISPB MUST** be used.

** Remote models **CIM1136R**, **CIM1135R** & **CIM1137R** require the **RCA-2061** remote condenser with optional grill guard kit.

Number of Wires: CIM1136/CIM1135: 3 (including ground) • CIM1137: 4 (including ground)
Approx. Shipping Weight lbs (kg): CIM1136A 230 (105) • CIM1136R 235 (107) • CIM1136W 225 (102) • CIM1135A 230 (105) • CIM1135R 235 (107) • CIM1135W 225 (102)
CIM1137A 230 (105) • CIM1137R 235 (107) • CIM1137W 225 (102)

REFRIGERANT: R404A