



Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

Project: \_\_\_\_\_

## Gas Convection Oven - Standard Depth

Models: ☐ RCOS-1 ☐ RCOS-2



RCOS-1 with optional pan rack

Gas Type: ☐ Natural ☐ LP

Elevation (if above 2000 ft.): \_\_\_\_\_

### Options and Accessories

- ☐ Stainless steel bottom shelf (RCOS-1 Only)
- ☐ Stacking kit to stack two single deck units (includes 6" legs)
- ☐ 5" swivel casters (set of four - 2 locking)
- ☐ Extra oven racks (Qty: \_\_\_\_\_)
- ☐ Glass view door for left side (right is standard)
- ☐ Direct connect vent kit
- ☐ Pan rack (RCOS-1 Only)
- ☐ Moisture injection

### Standard Features






- Accommodates full size sheet pans side to side
- Two Stainless Steel, 35,000 BTU/hr burners
- Electric thermostat adjustable from 150°-500° F
- Two speed motor
- Air deflectors strategically placed around the blower for efficient air circulation
- Cool touch controls set back for protection
- Electronic ignition with 100% safety
- Glass window in the right hand door
- Two interior lights
- Oven interior is porcelain coated for easy cleaning
- Doors feature 3 brass bushings per door hinge for perfect door alignment
- Oven doors swing open 135° for easier access for loading and removing pans
- 5 Chrome plated racks standard with 11 positions
- All S/S front, sides and top construction
- Unique stackable design requiring no additional flue extensions
- Oven interior useable space: 29" W x 22½" D x 24" H



**2 YEAR LIMITED, PARTS AND LABOR WARRANTY**

**Gas Convection Oven - Standard Depth**

# Gas Convection Oven - Standard Depth

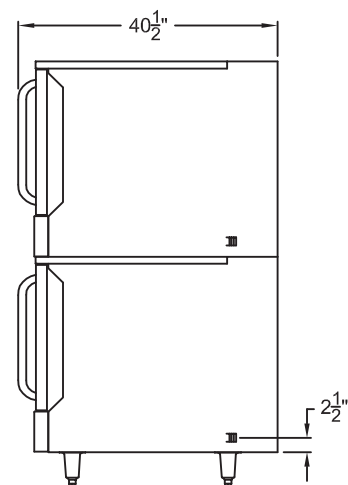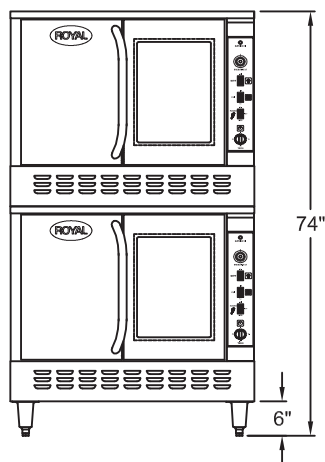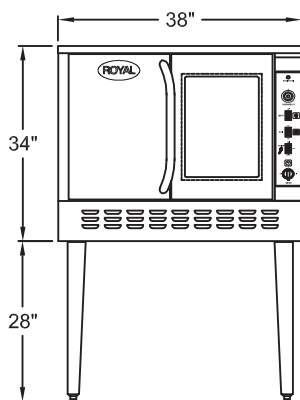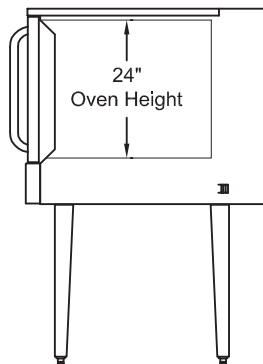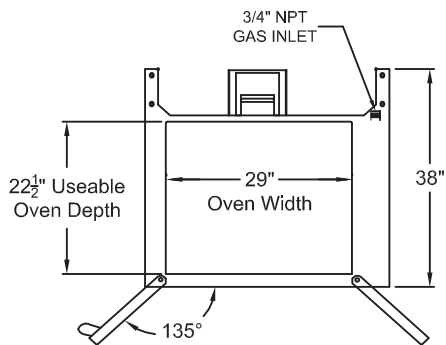

Model Number	Number of Burners	Total BTU	Ship Weight
RCOS-1	2	70,000	520 lbs.
RCOS-2	4	140,000	1,005 lbs.

## Gas Connection:

3/4" NPT on the right hand rear of the appliance.

The pressure regulator (supplied) is to be connected by the installer.

## Gas Pressure:

5" W.C.	Natural Gas
10" W.C.	Propane

## Clearances:

	Combustible	Non-Combustible
Rear	6"	0"
Sides	6"	0"

Specify type of gas and altitude, if over 2,000 feet, when ordering.

## Electrical Requirements:

120VAC, 50-60Hz, 1 Ph., 8 amps

Two speed motor (1725/1140 RPM), 1/2 HP

Provided with 6' power cord fitted with a standard three prong grounded plug

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

## Royal Range of California, Inc.

3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600

Fax: (951) 360-7500 • [www.royalranges.com](http://www.royalranges.com) • [sales@royalranges.com](mailto:sales@royalranges.com)