



Item: _____
Quantity: _____
Project: _____

48" Gas Restaurant Range

Royal Series

Models: ☐ RR-8 ☐ RR-6G12 ☐ RR-4G24 ☐ RR-2G36 ☐ RR-G48
☐ RR-4RG24 ☐ RR-8SU ☐ RR-6GT12 ☐ RR-4GT24 ☐ RR-2GT36 ☐ RR-GT48



RR-4G24 with optional casters

Gas Type: ☐ Natural ☐ LP

Elevation (if above 2000 ft.): _____

Options and Accessories

- ☐ 6" high S/S stub back in lieu of high shelf
- ☐ 1" thick griddle plate
- ☐ Griddle on the right (Left hand side standard)
- ☐ Chrome griddle plate
- ☐ Grooved griddle (specify width: _____")
- ☐ One thermostat per burner (GT Griddle Series)
- ☐ One 26½" Convection Oven - add suffix "-126C"
Cabinet space: ☐ Left ☐ Right
- ☐ One standard 20" W Oven - add suffix "-120"
Cabinet space: ☐ Left ☐ Right
- ☐ One standard 26½" W Oven - add suffix "-126"
Cabinet space: ☐ Left ☐ Right
- ☐ 12" hot top section - add suffix "-HT"
- ☐ 9" deep S/S landing ledge, with or without sauce pan cutouts
- ☐ Additional oven racks
- ☐ Open cabinet base - add suffix "-XB"
- ☐ Cabinet doors
- ☐ Intermediate shelf
- ☐ Wok burner head with 10" diameter S/S ring
- ☐ 48" quick disconnect and restraining cable
- ☐ 5" swivel casters (set of four - 2 locking)


Standard Features

- Stainless steel drip tray/grease can
- Two 20" wide ovens
- Accommodates 18" x 26" full size sheet pan
- Stainless steel front, sides, valve cover and kick plate including backguard and high shelf
- Stainless Steel oven "U" burner rated at 27,000 BTU/hr
- Oven pilot with 100% safety shut down
- Two piece, heavy duty lift off cast iron burner heads rated at 30,000 BTU/hr
- 12" x 12" cast iron top grates with pilot shield
- Solid welded heavy gauge metal frame
- Five position heavy gauge chrome rack guides
- One chrome rack per oven
- Five surface porcelain oven interior
- Stainless steel tubing for burners and pilots
- 3/4" thick polished steel griddle plate
- GT Griddle Series - standard with one thermostat per two burners
- SU - step up rear burners
- RG - raised griddle/broiler



2 YEAR LIMITED, PARTS AND LABOR WARRANTY

48" Gas Restaurant Range

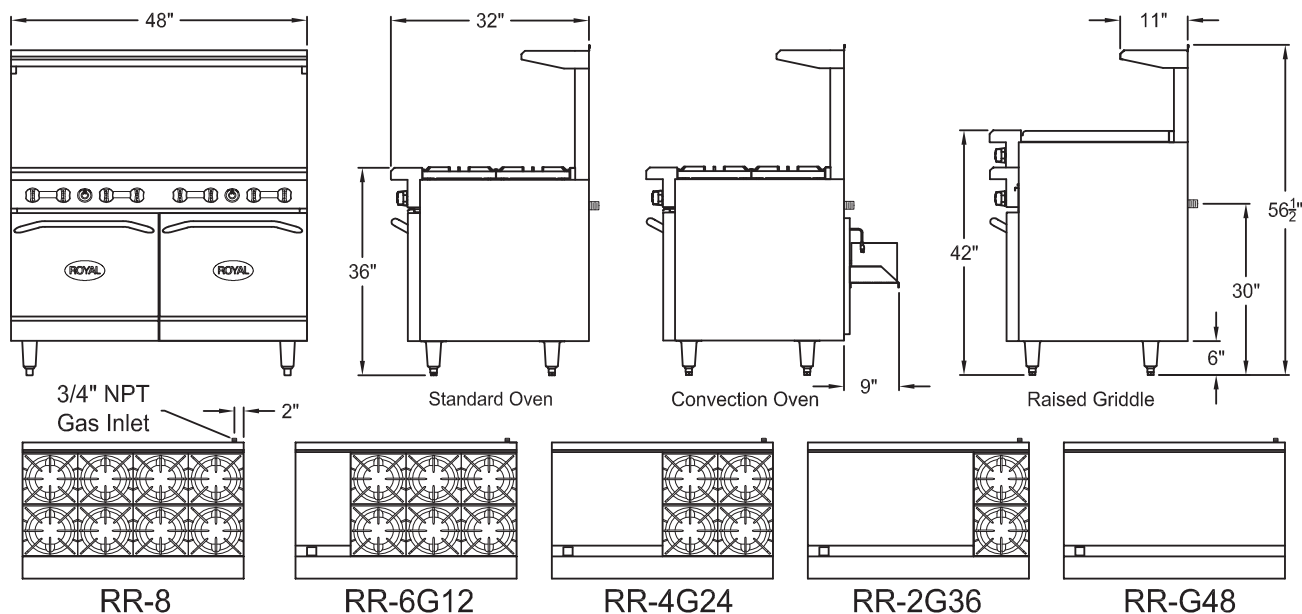

| Model Number | Open Burners | Griddle Burners | Total BTU | Ship Weight |
|--------------|--------------|-----------------|-----------|-------------|
| RR-8 | 8 | 0 | 294,000 | 800 lbs. |
| RR-6G(T)12 | 6 | 1 | 254,000 | 820 lbs. |
| RR-4G(T)24 | 4 | 2 | 214,000 | 830 lbs. |
| RR-2G(T)36 | 2 | 3 | 174,000 | 850 lbs. |
| RR-G(T)48 | 0 | 4 | 134,000 | 870 lbs. |
| RR-4RG24 | 4 | 2 | 214,000 | 910 lbs. |
| RR-8SU | 8 | 0 | 294,000 | 810 lbs. |

Notes:

- For no oven (storage base) add suffix "-XB" and deduct 54,000 BTUs.
- For one 20" oven and open storage add suffix "-120" and deduct 27,000 BTUs.
- For single 26-1/2" standard oven and open storage add suffix "-126" and deduct 19,000 BTUs
- For single 26-1/2" Convection Oven add suffix "-126C" and deduct 24,000 BTUs.
- Open burners at 30,000 BTU/hr each.
- Griddle Burners: 1 per 12" at 20,000 BTU/hr each.
- Oven burners at 27,000 BTU/hr each.

Gas Connection:

3/4" NPT on the right hand rear of the appliance.

The pressure regulator (supplied) is to be connected by the installer.

Electrical Requirements:

Convection Oven: 120 V, 50/60hz, 1 Ph., 8 amps

Two speed motor (1725/1140 RPM) 1/2 HP.

Provided with 6' power cord fitted with a standard three prong grounded plug.

Add 75# shipping weight

Gas Pressure:

| | |
|----------|-------------|
| 5" W.C. | Natural Gas |
| 10" W.C. | Propane |

Clearances:

| | Combustible | Non-Combustible |
|-------|-------------|-----------------|
| Rear | 4" | 0" |
| Sides | 15" | 0" |

Specify type of gas and altitude, if over 2,000 feet, when ordering.

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.

3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600

Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com